

THE 'OT' RECEIVER HAS A SLANTED SURFACE UPON WHICH THE LATCH HOOK SLIDES WHEN LOCKING, IMPARTING A LATERAL FORCE, THEREBY COMPRESSING THE DOOR PANEL AGAINST THE CASE. THIS IS ESPECIALLY BENEFICIAL WHEN GASKETING IS INVOLVED. BOTH THE 'OT' AND 'IT' RECEIVERS CAN BE USED EITHER INSIDE OR OUTSIDE A CASE.

SEE TDS 21-2A FOR THE 'IT' RECEIVER.



Fig. 1 In this view the 'OT' Receiver is mounted on the outside of the case and the Type 1 Latch is on the door, with the hinge below. The Latch hook pulling downward on the slanted surface of the Receiver forces the door inward against the case.

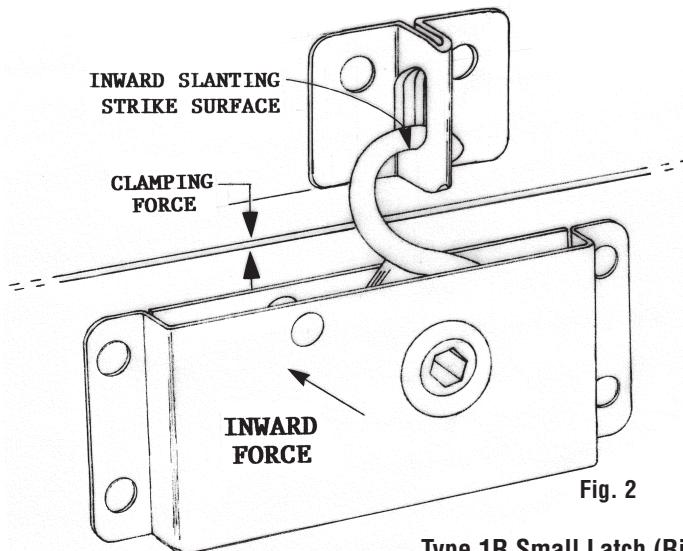


Fig. 2

Type 1R Small Latch (Right Hand)

Part No.: **S1125-1R-562**

Shown with 'OT' Receiver

Part No: **OTR187**

Left Hand Latch Available

See TDS 21-2A for internally mounted 'IT' Receiver

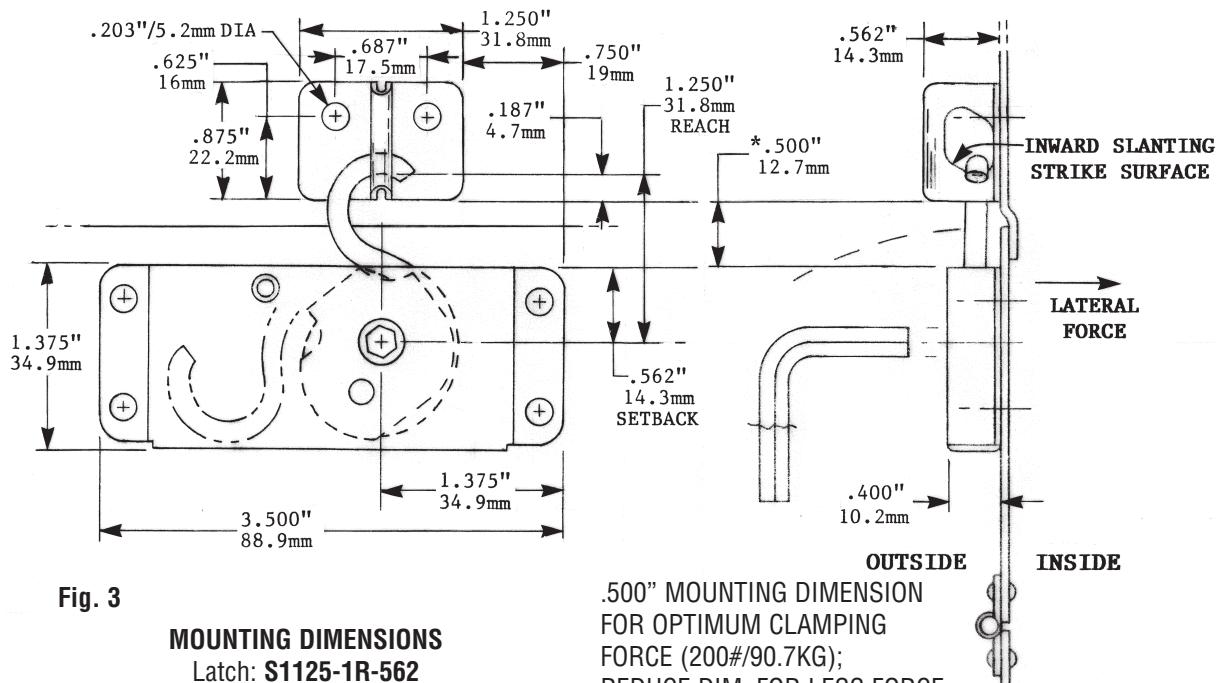


Fig. 3