

**SHOWN HERE RECESSED BENEATH SECTIONAL FLOORING,
LATCHES ARE OPERATED WITH A HEX KEY THRU THE FLOOR**

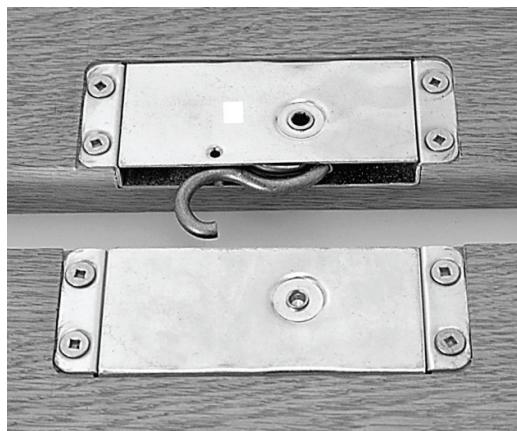


Fig. 1 The Type 1R Latch and Receiver are shown in the unlocked condition, flush mounted underneath the flooring.

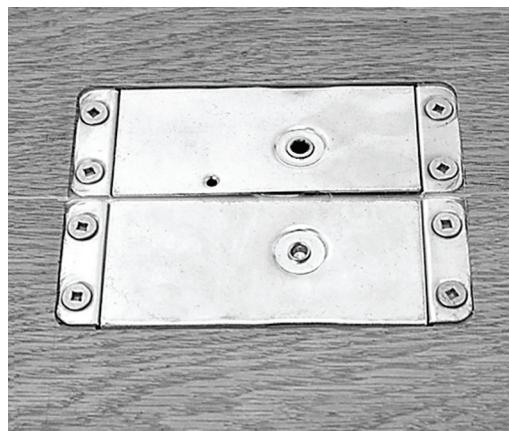


Fig. 2 The Type 1R Latch and Receiver shown in the locked mode. The operating key access is down thru the floor.

**Latch and Receiver case flanges are dimpled upward to accept #10 FHWS.
“DU” in the part number denotes “dimpled upward” (e.g., S1125-1R-562DU)**

