

FOR JOINING MEMBERS AT 90° 'T' OR CORNER JOINTS

THE NORSE TYPE 1R RIGHT-HAND LATCH SHOWN, AND THE TYPE 1L LEFT HAND (ALSO AVAILABLE), ARE NORMALLY SURFACE MOUNTED. NO PANEL PREPARATION IS REQUIRED. THIS LATCH/ RECEIVER COMBINATION IS USED FOR RAPIDLY ERECTED ROOMS, ENCLOSURES, SHIELDS, THEATRICAL SCENERY, DISPLAYS, COUNTERS, SHELF SUPPORT, VALANCES, INSTITUTIONAL FURNITURE, SIGNS, SLIDING AND HINGED DOORS, ETC.



Type 1R Latch and Type 'D' Receiver
Latch: S1500-1R-750
Receiver: DR468-500

For a typical 90-degree, surface-mounted joint where bracing is required see TDS-40.

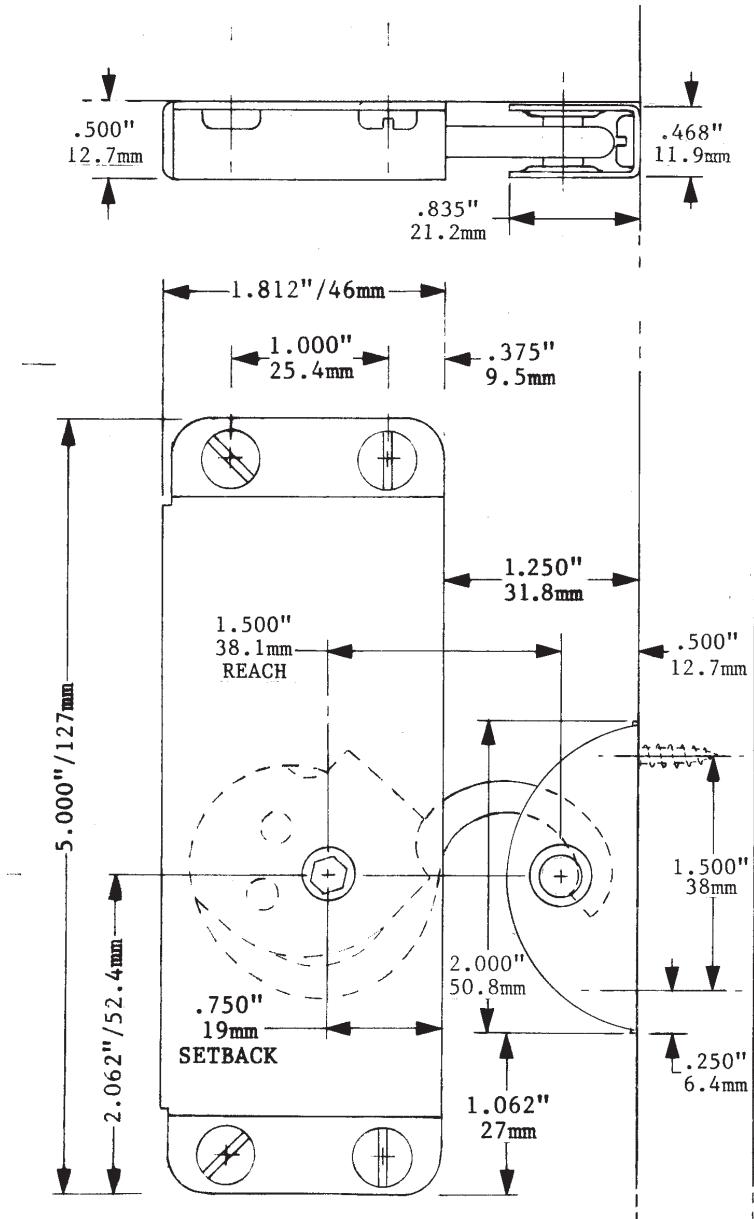


Fig. 2

MOUNTING DIMENSIONS

Latch: S1500-1R-750
Receiver: DR468-500