


**Either the S1500 or the S1250 Spring Hook can be Utilized
in the Type 3 Latches**

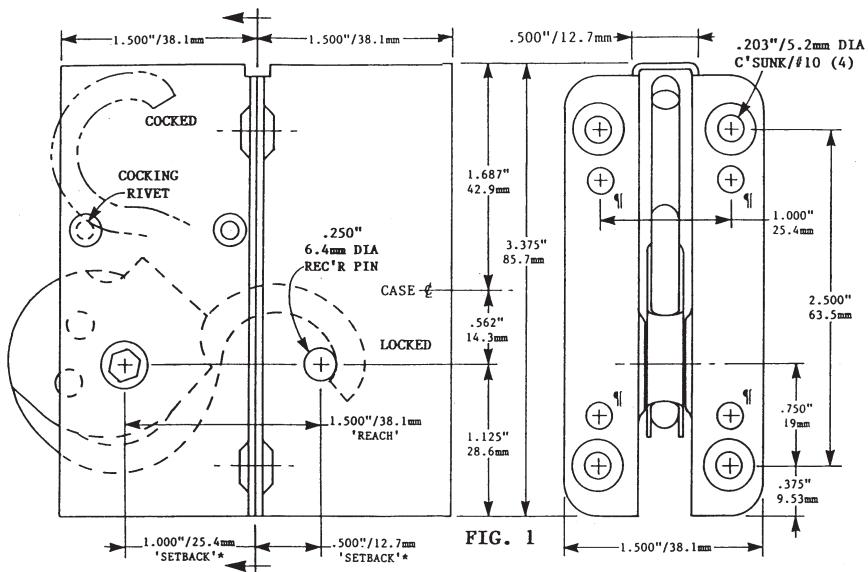

LATCH
S1500-3-1.000

RECEIVER
R500-3-500

LATCH ONLY
Face View




Fig. 4A The mortise required for a Type 3 Latch





Fig. 4B A Type 3 Latch installed.
(See TDS 108)

Type 3 LATCH with S1500 Spring Hook
Spring Hooks can be Reverse-Mounted in Type 3 Cases

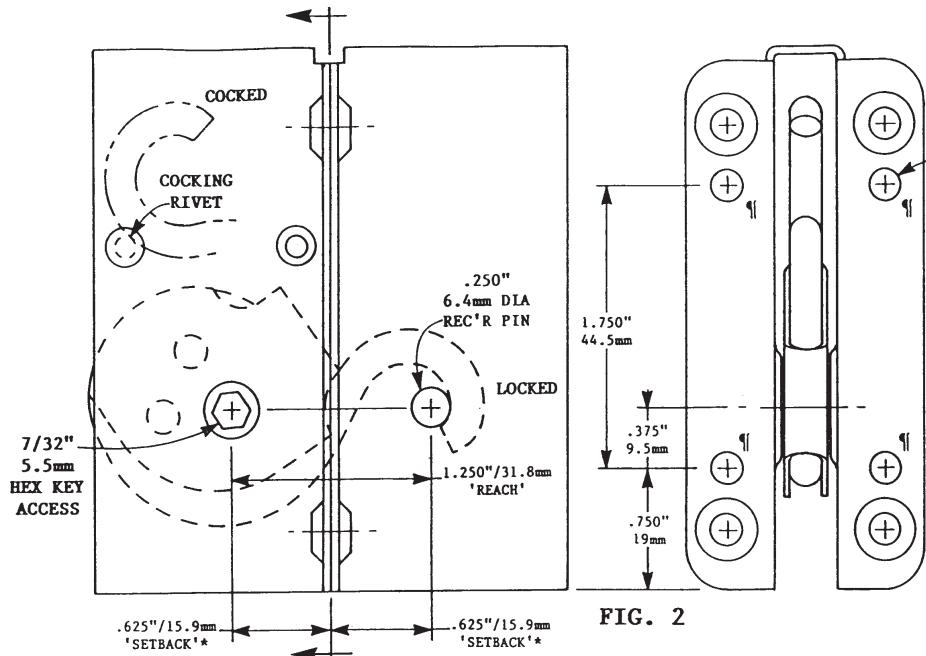

LATCH
S1250-3-625


RECEIVER
R500-3-625

LATCH ONLY
Face View

Type 3 LATCH with S1250 Spring Hook

The Difference Between the 'Reaches' of the S1500 and S1250 Spring Hooks Enables the Fabricator to Solve Numerous Application Requirements.

* The 'Setback' is the location of the key access hole from the mounting flange face of the Latch case, or of the Receiver pin from the mounting Flange face of the Receiver case.

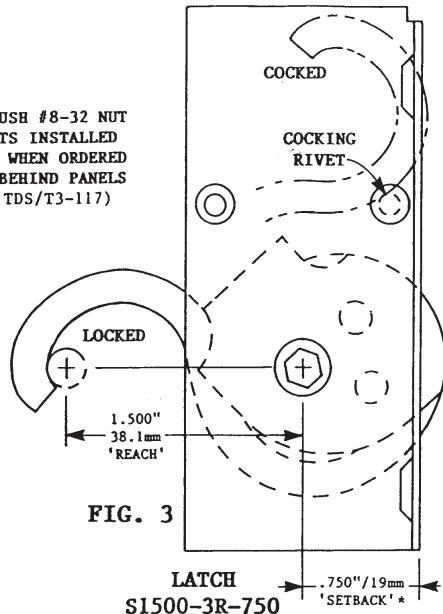

LATCH
S1500-3R-750

**Type 3 LATCH with
S1500 Spring Hook Reverse
Mounted**

To specify Reverse Mounted attaches, add 'R' to the part number.
(i.e.: S1500-3R-750)
All Variable "Setbacks" available.